

A6

METRIC



The full electric tracked apron feeder A6 functions as a buffer with its 8m³ hopper and makes sure the following machine, often a stacker, is evenly fed with material.



The hopper can be turned 90°, so hopper can be aligned with tracks or in 90° position

Apron feeder can be lifted hydraulically from transport to operation position (20-25°)

35 kWh

Electric plug-in mains

- Applications**
- Buffer
 - Load

- The full electric tracked apron feeder A6 functions as a buffer with its 8m³ hopper and makes sure the following machine, often a stacker, is evenly fed with material.
- Can power several e-driven machines separately or in line
- Standard 450L tank

TECHNICAL SPECIFICATIONS	
Capacity up to	600 t
Weight	14 t
Hopper	8 m ³
Feed hopper in HB450	•
Hydraulic foldable hopper walls	•
Loading height	3350 mm
	Loading width (back) 3100 mm
	Side loading length 4400 mm
	Wear lining •
Heavy Duty Plate Apron Feeder	3560 mm x 1300 mm
Swiveling hopper by 90°, hopper can be in line with tracks or in 90° position	•
Track-unit: Length, total width, track shoe width	3314 mm, 2500 mm, 400 mm
2-speed track drive	1,1 km/h and 2 km/h
Engine unit(s)	Electric plug-in
Control	PLC – IP 67 LCD screen 4,3" & remote control
Available drive systems	
	Diesel/hydraulic drive /
	e-drive Diesel/hybrid, electric plug-in & plug-out /
	ZERO drive (no combustion engine, plug-in electric) •

OPTIONS


Wear lining in HB450/500	•
Hopper extensions up to 15m ²	•
Increased feeding chute	•
Radio remote	•
Volumetric belt scale on apron feeder	•

TRANSPORT

Transport l x w x h (mm)	5000 x 2550 x 3120 mm
--------------------------	-----------------------

LEGENDA

•	applicable - available
/	not applicable- not available

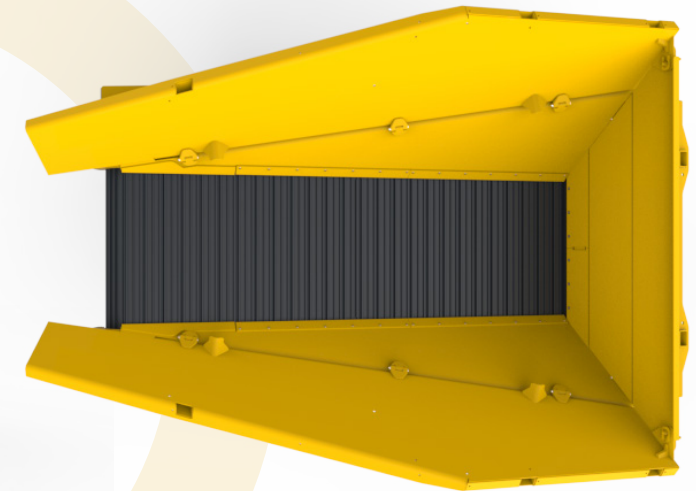


METRIC



The full electric tracked apron feeder A6 functions as a buffer with its 8m³ hopper and makes sure the following machine, often a stacker, is evenly fed with material.

IMPERIAL

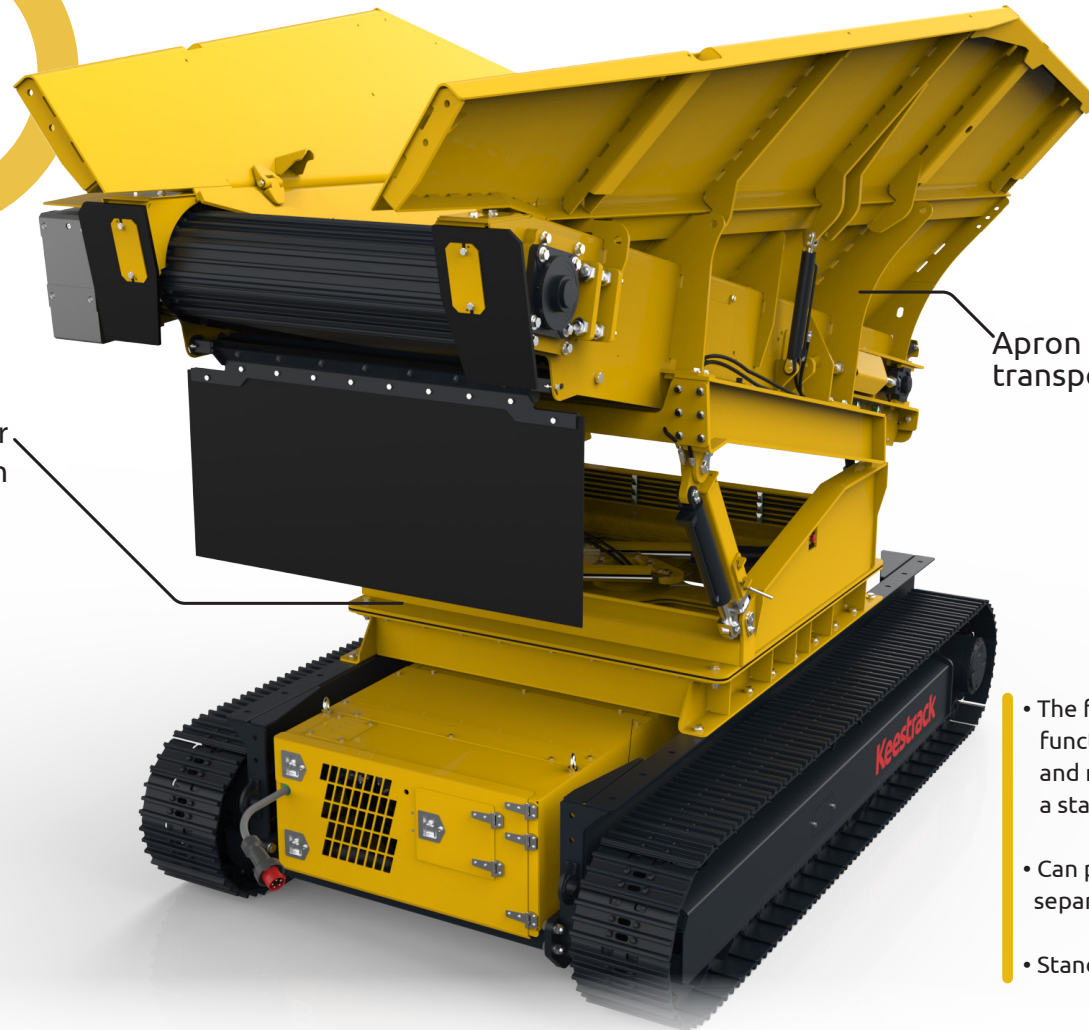

Apron feeder can be lifted hydraulically from transport to operation position (20-25°)

The hopper can be turned 90°, so hopper can be aligned with tracks or in 90° position

35
kWh

Electric plug-in
mains

Applications

Buffer
Load

- The full electric tracked apron feeder A6 functions as a buffer with its 8m³ hopper and makes sure the following machine, often a stacker, is evenly fed with material.
- Can power several e-driven machines separately or in line
- Standard 450L tank


TECHNICAL SPECIFICATIONS		
Capacity up to	660 sT	
Weight	15 sT	
Hopper	10 yard ³	
Feed hopper in HB450	•	
Hydraulic foldable hopper walls	•	
Loading height	11'8"	
	Loading width (back)	10'2"
	Side loading length	14'5"
	Wear lining	•
Heavy Duty Plate Apron Feeder	11'8" x 4'3"	
Swiveling hopper by 90°, hopper can be in line with tracks or in 90° position	•	
Track-unit: Length, total width, track shoe width	10'11", 8'2", 1'4"	
2-speed track drive	0,7 / 1,2 mph	
Engine unit(s)	Electric plug-in	
Control	PLC – IP 67 LCD screen 4,3" & remote control	
Available drive systems		
Diesel/hydraulic drive	/	
e-drive Diesel/hybrid, electric plug-in & plug-out	/	
ZERO drive (no combustion engine, plug-in electric)	•	

OPTIONS

Wear lining in HB450/500	•
Hopper extensions up to 19,6 yard ²	•
Increased feeding chute	•
Radio remote	•
Volumetric belt scale on apron feeder	•

TRANSPORT	
Transport l x w x h	16'5" x 8'4" x 10'3"

LEGENDA	
•	applicable - available
/	not applicable- not available

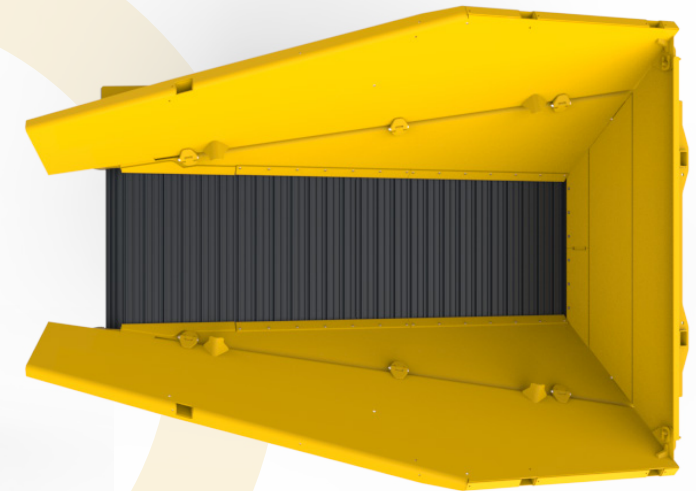

IMPERIAL

