

Keestrack




Performance in every detail

H6 CONE CRUSHER

| Belgium | Czech | China | Italy | India | USA |

H6 CONE CRUSHER

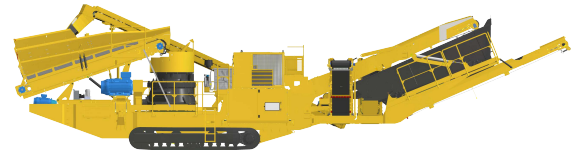

TECHNICAL SPECIFICATIONS

Feed hopper

Capacity	8 m ³
Wear lining	HB 450
Height	3.700 mm

Belt feeder

Dimension (width x length)	1.200 x 5.360 mm
----------------------------	------------------

Crusher

Maximum feed size	215 mm
Throughput capacity	Up to 395 t / h
Setting C.S.S.	16 - 44 mm
Drive	Electric direct drive, 220 kW

Track-unit

Dimension (width x length)	500 x 4.055 mm
2 speeds	1 - 2 km / h

Mainbelt conveyor

Dimension (width x length)	1.200 x 12.440 mm
Discharge height	4.800 mm
Speed	1,6 m / s
For transport	Hydraulically foldable

Engine unit

Power	313 kW / 1.500 rpm
Fuel tank	425 l
Hydraulic oil tank	120 l

Control

Type	PLC - IP67
Display	12" LCD
Controller	Remote control

OPTIONS

After screen system

Screen type	3 deck
Dimension (width x length)	1.800 x 4.500 mm
After screen conveyor (width x length)	650 x 10.400 mm
Middle fraction fine conveyor (width x length)	650 x 5.920 mm
Middle fraction coarse conveyor (width x length)	650 x 5.920 mm
Fines conveyor (width x length)	1.200 x 6.800 mm
Discharge height	4.160 mm

Dust suppression system

Spraying area	Main conveyor discharge
Water pump	1,1 kW

Metal detector

Detection sensitivity	Adjustable
-----------------------	------------

Heating system lube oil tank

Power	Up to 9,1 kW
-------	--------------

Fuel filling pump

Flow capacity	80 l / min
---------------	------------

Radio remote control

Type	Handheld, multi functions remote control
------	--

Working light

No. of lamps	4 pieces
--------------	----------

TRANSPORT DIMENSIONS AND WEIGHT

Length	: 15.000 mm / 20.330 mm (with screen)
Height	: 3.650 mm
Width	: 3.000 mm
Weight	: 51,4 t / 62,1 t (with options)

