

# Keestrack




Performance in every detail

## K3 SCALPER

| Belgium | Czech | China | Italy | India | USA |

# K3 SCALPER

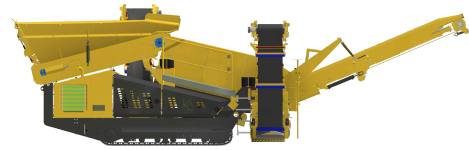

## TECHNICAL SPECIFICATIONS

Feed hopper	
Capacity	3,5 m <sup>3</sup>
Discharge height	2.410 mm
Plate apron feeder	
Dimension (width x length)	1.000 x 3.150 mm
Feed capacity	Up to 250 t / h
Vibrating screen	
Screen type	Double deck
Dimension (width x length)	1.200 x 2.700 mm
Belt conveyor	
Fine fraction conveyor (width x length)	650 x 8.000 mm (Hydraulically foldable)
Middle fraction conveyor (width x length)	650 x 8.000 mm (Hydraulically foldable)
Coarse conveyor (width x length)	1.000 x 5.000 mm (Hydraulically foldable)

Track-unit	
Dimension (width x length)	400 x 2.965 mm
2 speeds	1,1 / 1,9 km / h
Engine unit	
Power	55,4 kW / 1.800 rpm
Fuel tank	280 l
Hydraulic oil tank	220 l
Control	
Type	PLC - IP67
Display	3,5" LCD
Controller	Remote control

## OPTIONS

Magnetic separator	
Magnetic power	400 GAUSS (250 mm distance)
Anti clogging system	
Application	Separation of sticky material
Screen flow brake	
Application	Increase screening efficiency

Picking station	
Position	On either side
Radio remote control	
Type	Handheld, multi functions remote control
Working light	
No. of lamps	4 pieces

## OPTIONAL MODEL

K3<sub>e</sub> scalper hybrid version

## TRANSPORT DIMENSIONS AND WEIGHT

Length	: 9.800 mm
Height	: 3.120 mm
Width	: 2.550 mm
Weight	: 17 t without options

