

Keestrack




Performance in every detail

K4 SCALPER

| Belgium | Czech | China | Italy | India | USA |

K4 SCALPER

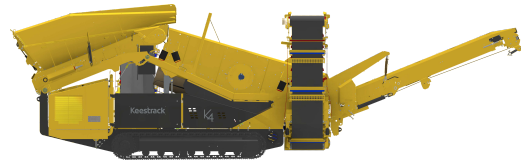

TECHNICAL SPECIFICATIONS

| Feed hopper | |
|---|---|
| Capacity | 7 m ³ |
| Discharge height | 3.336 mm |
| Plate apron feeder | |
| Dimension (width x length) | 1.120 x 3.150 mm |
| Feed capacity | Up to 350 t / h |
| Vibrating screen | |
| Screen type | Double deck |
| Dimension (width x length) | 1.500 x 4.200 mm |
| Belt conveyor | |
| Fine fraction conveyor (width x length) | 900 x 8.350 mm (Hydraulically foldable) |
| Middle fraction conveyor (width x length) | 800 x 8.280 mm (Hydraulically foldable) |
| Coarse conveyor (width x length) | 1.200 x 5.000 mm (Hydraulically foldable) |

| Track-unit | |
|----------------------------|------------------|
| Dimension (width x length) | 400 x 3.310 mm |
| 2 Speeds | 1,3 - 2,2 km / h |
| Engine unit | |
| Power | 55 kW or 88 kW |
| Fuel tank | 280 l |
| Hydraulic oil tank | 220 l |
| Control | |
| Type | PLC - IP67 |
| Display | 4,3" LCD |
| Controller | Remote control |

OPTIONS

| Anti clogging system | |
|----------------------|-------------------------------|
| Application | Separation of sticky material |
| Screen flow brake | |
| Application | Increase screening efficiency |
| Picking station | |
| Position | On either side |

| Coarse conveyor (long version) | |
|--------------------------------|--|
| Dimension (width x length) | 1.200 x 6.800 mm |
| Radio remote control | |
| Type | Handheld, multi functions remote control |
| Working light | |
| No. of lamps | 4 pieces |

OPTIONAL MODEL

K4_e scalper hybrid version

TRANSPORT DIMENSIONS AND WEIGHT

Length : 10.681 mm
 Height : 3.130 mm
 Width : 2.550 mm
 Weight : 26,5 t without options

